

EBX-2210D-C4

Fanless Intel Celeron J1900 2.0 GHz, 4COM, 2LAN, VGA/HDMI, 2USB3, 6USB2, DC-IN 9-36V




Features

- With Intel BayTrail-D Celeron Quad-Core J1900 2.0GHz CPU
- Optimized performance and low power system
- Dual display VGA/HDMI, dual Gigabit LAN, 2xUSB 3.0, 4-6xUSB 2.0
- 4x COM, COM1/2 by RS-485/422/232, COM3/4 by RS-232 (4USB2)
- Power switch by 2-pole connector for remote control (by project)
- Wide DC 9-36V Input by 2-Pin phoenix connector
- Supports Microsoft Windows Embedded 8.1 Pro, Embedded Std 8, WS7P, WS7E
- ATM, Kiosk, self-service, machine automation, IoT gateway platform

Specifications

	CPU	EBX-2210D-C4
Processor System	CPU Max. Speed(Core)	2.0GHz Quad Core
	L2 Cache	2MB
	CPU/ TDP 15W	Celeron J1900 / 10W
	BIOS	AMI 16Mb AMI UEFI with GUI support
	Graphics Processor	Intel HD Graphics
Expansion Slot	Mini-PCIe / mSATA	1 x full-size (shared with mSATA)
	Mini-PCIe (Half-size)	1 x half-size
Memory	Specification (SO-DIMM)	1 x DDR3L-1333
	System Max. Capacity	8GB
Graphics	VGA	1 x VGA(1920x1200)
	HDMI	1 x HDMI (1920x1200)
	LVDS(Internal header)	1 x Dual channel 24-bit LVDS up to1920 x 1200, (Custom LVDS solution for LCD)
Ethernet	LAN Gigabit Controller	Realtek RTL8111E-VL
Storage	2.5" Driver	1 x SATA1 for 2.5" SATA drive
	mSATA	1 x full-size Mini-PCIe shared with SATA2
	SATADOM	Options 32GB SATAIII on SATA2 (mSATA disabled)
Rear Bezel I/O	VGA	1 x DB-15
	HDMI	1 x HDMI
	Ethernet	2 x RJ45
	USB Type A	2 x USB 3.0, 2 x USB 2.0
	Line-out	1 x Audio jack (Line-out)
	Mic-in	1 x Audio jack (Mic-in)
	System Power Input	1 x 2-pin phoenix connector 9-36Vdc Input
	Antenna	2 x Antenna holes (options)
Front Bezel I/O	Power-On Button	1x Moment button switch to turn-on system
	System Power LED	1x LED for system power status
	HDD LED	1x LED for SATA HDD data access status
	COM1-2 Ports	2 x DB-9 (2 x RS-485/422/232, Pin9 +5/+12V selectable,)
	COM3-4 Ports	2 x DB-9 (2 x RS-232)
	USB Type A	2 x USB 2.0
	Customized LVDS Port	Customized LVDS solution for open frame LCD display
Operation System	Win 7	Win 7 32-bit, 64-bit, WS7E/WS7P 32-bit, 64-bit
	Win 8	Win 8 32-bit, 64bit
Watchdog Timer	Output and Interval	System reset, programmable 1 ~ 255 sec/min; 1 sec. or 1min. /setp
Power Requirement	DC Input	9-36Vdc input (option DC12V 60W adapter)
Environment	Operating Temperature	-10°C ~60°C(32~140°F)
	Air Flow condition	50°C -60°C with 0.7m/s air flow
	Storage Temperature	-40 ~ 85°C (-40 ~ 185°F)
Physical Size	Dimensions	225mm(W) x 140mm(D) x 45mm(H)
Packing Size	Dimensions	300mm(W) x 260mm(D) x 130mm(H)
Weight	N.W / G.W.	Single packed: 3Kg / 4Kg

Dimensions Outlook

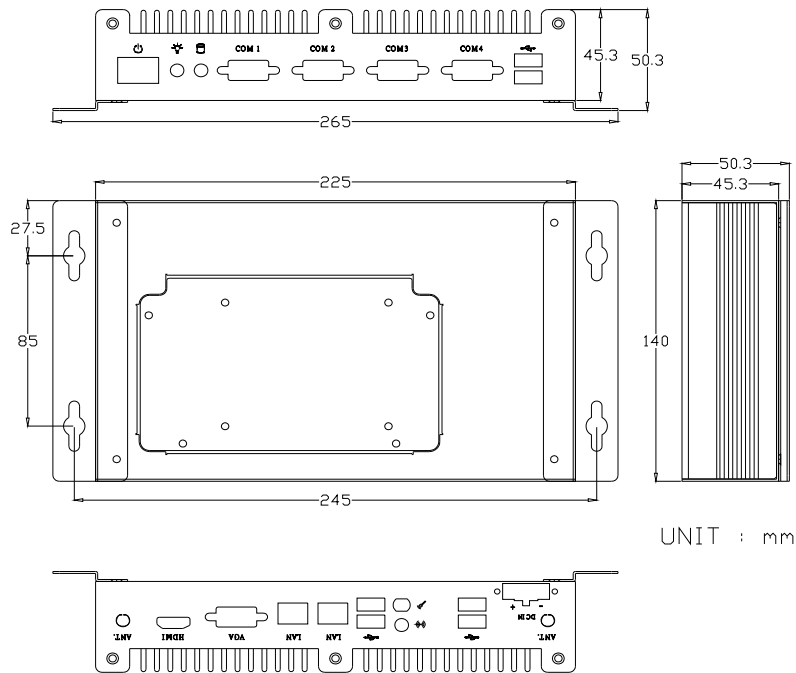

Ordering Information

Part Number	CPU	VGA/HDMI	GbE	USB 3.0 / 2.0		COM	RAM	Mini-PCIe / mSATA		*SATADOM	2.5" SSD/HDD
EBX-2210D-C4-M0-m00P0	J1900	2	2	2	4	4	Option	Disabled	Enabled	N/A	Option
EBX-2210D-C4-M4-m064P0	J1900	2	2	2	4	4	4GB	Disabled	64GB	N/A	Option
EBX-2210D-C4-M4-SD064P0	J1900	2	2	2	4	4	4GB	Enabled	Disabled	Option	2.5" SSD 64GB
EBX-2210D-C4-M4-HD320P0	J1900	2	2	2	4	4	4GB	Enabled	Disabled	Option	2.5" HDD 320GB

Optional Items

Part Number	Description
EBX-WM-BK	EBX-1210 Wall Mount Bracket Kits, Black, with Screws
SODIMM-DDR3-2GBL / 4GBL / 8GBL	204-Pin SODIMM DDR3-1333, 2GB / 4GB / 8GB (1.35V)
MSD-M032 / MSD-M064	mSATA SSD Module MLC, Toshiba TSOP 19mn, 32GB / 64GB
SA-HD320/HD500	2.5" SATA HDD 7mm height, 320GB / 500GB
SA-HG500	2.5" SATA HDD 7mm height, 500GB 7200RPM, 0-60C for 7x24
SA-SD064 /SD128	2.5" SATA SSD 7mm height, 64GB / 128GB
WF-RTL8188	Wi-Fi Module RTL8188, Mini-PCIe Half-size, with wire and antenna, LAN 802.11b/g/n
WPEA-152GN(BT)	Wi-Fi / BT, Mini-PCIe Half-size Atheros AR9495 + AR3012, wire and antenna, LAN 802.11b/g/n, BT 4.0LE/3.0HS/2.1EDR
DBAE1-60W-2P	AC-DC 60W Adapter, 90V-264Vac input by C14 socket, DC 12V@5A output with 2-pin phoneix connector