

# Quad Screen Splitter LCD Console Drawer – Large Screen

DVI-D, USB, Audio, Hub



Switching port by simply moving the mouse cursor across each screen boundary on QSS mode

## Features


Quad Screen Splitter (QSS) LCD console drawers represents the latest technology in KVM switching. The key advantage over conventional KVM switches is that it allows you to simultaneously display and administer 4 computers on a single console. It combines KVM features and a digital multi-viewer scaling and converting videos at both inputs and output.

Configure with 21.5 or 23.8 inch A-Grade FHD LCD panels, integrated 4 ports DVI-D/USB/Audio/HUB, support Full screen and Quad screen mode.

The self-locking rails when in the fully extended open position and the ultra convenient auto lock release when the LCD panel is closed, make for simple and hassle free operation.

- 1U single rail with 21.5" or 23.8" LCD Monitor,
- Support FHD with 1080p resolution.
- Four Independent DVI-D/USB/Audio/HUB interface for each PC.
- Support Full screen and Quad screen mode
- On Quad Screen mode, by Mouse moving across screen boundary or via Push Button or Hotkey to switching port
- Front 1x, rear 2x USB 2.0 Type A, Sharing USB peripheral Device for each computer. (Ex, flash disk, hard driver, KB/Mouse)
- Build in 2x2w stereo speakers.
- Durable 104-key keyboard and touch pad.
- Quick and simple installation.
- Self-locking and auto release rails for ultra convenience.

Rear of KVM-2104/2404QSS-M2



Part No.	KVM-2104QSS-M2	KVM-2404QSS-M2	
Direct no. of Computers	4 x DVI-D/ USB / Audio & 2x HUB		
Maximum no. of Computers	4		
LCD	Size	21.5"	23.8"
	Backlight	LED	
	Resolution	1920*1080 FULL HD (support up to 1920*1200)	
	Max.color	16.7M	
	Luminance	250cd/m2	
	View Angel (H/V)	178 / 178	
	Contrast Ratio	3000 : 1	
Port Selection	Mouse moving across screen boundary , Push Button or Hotkey		
USB HUB	Front 1x, rear 2x USB 2.0 Type A for USB Peripheral Device		
KB/Mouse Emulation	USB		
Rack Depth	500mm to 1100mm ( rack cabinet front rails to rear rails )		
Power	100-240V AC 50/60Hz via IEC Type power cord		
Environment	Operation temp: 0 to 50℃ Storage temp: -20 to 60℃ Humidity: 10% - 90%, non-condensing Shock: 10G acceleration ( 11ms duration) Vibration: 17 to 500Hz 1G PTP		
Physical Dimensions / Net Weights	448x42x795mm (WxHxD) / 15.5KG	448x42x795mm (WxHxD) / 16KG	
Packing Dimensions / Gross weights	705x168x930mm (WxHxD) / 23KG	705x168x930mm (WxHxD) / 23.5KG	
<b>Accessory</b>			
1.8meter IEC Type Power Cord , 1.8meter DVI Cable x4 , 1.8meter USB Cable x 4 , 1.8meter Audio Cable x 4			



Specifications subject to change without notice

# Quad Screen Splitter LCD Console Drawer – Large Screen

DVI-D, USB, Audio, Hub



Rear of KVM-2104/2404QSS-M2

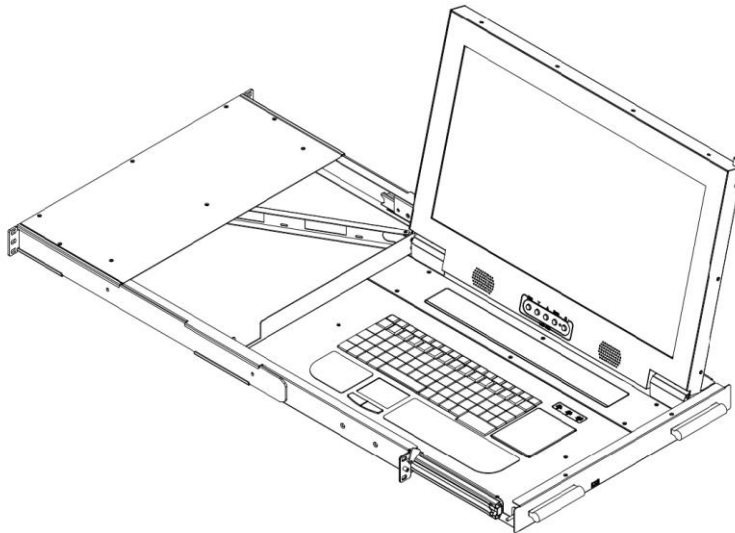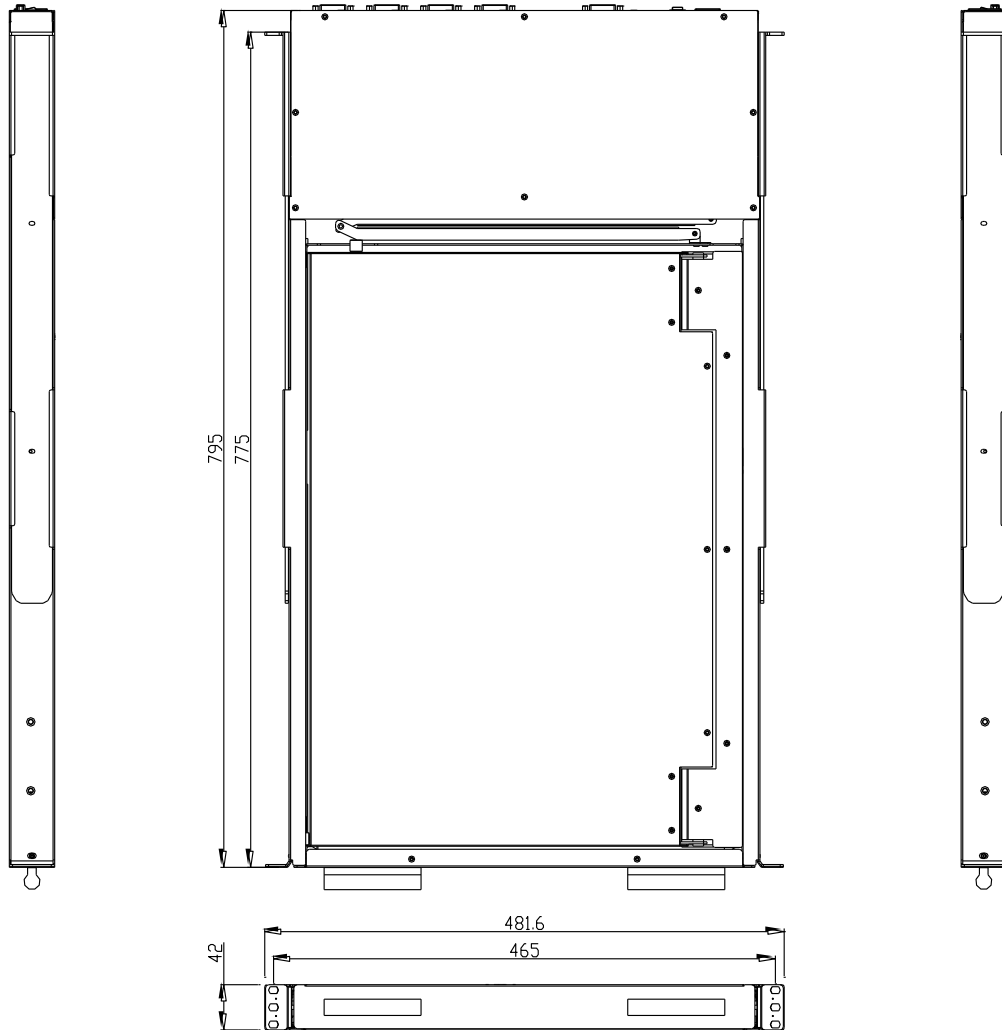

USA (Head Quarter)  
Denichi Computer Devices, Inc.  
13200 Pond Springs Rd. #A102, Austin, TX 78729  
Office: 512-837-2655  
Fax: 512-837-1694  
Email: sales@denichi.com

China (Factory)  
Add : The south faces industry area of Xia Gang Fu Hai road, Chang'an Town, Dongguan City, Guangdong, China  
Email: sales@denichi.com